



The
Patent
Office

REC'D 22 SEP 1999

WIPO

PCT

INVESTOR IN PEOPLE

EP 99/5329

EPO - DG 1

16. 07. 1999

(75)

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

EJW

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

2 JUN 1999


PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

An Executive Agency of the Department of Trade and Industry



Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

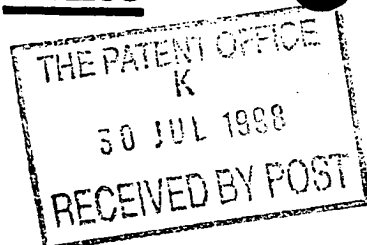

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

95.0108

2. Patent appli
(The Patent O)

9816479.1

30 JUL 1998

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Sofitech NV
142, Rue de Stalle
B-1180 Brussels
Belgium

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Belgium

6546 303004

4. Title of the invention

WELLBORE FLUID

5. Name of your agent (if you have one)

B D Stoole

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Geco-Prakla Technical Services Inc
Schlumberger House
Buckingham Gate
Gatwick
West Sussex RH6 ONZ

Patents ADP number (if you know it)

708 6721001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 10 /

Claim(s) 2 /

Abstract 1 /

Drawing(s) 2 + 2 /

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 /

Request for preliminary examination and search (Patents Form 9/77) 1 /

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11.

B D Stooles

☒ We request the grant of a patent on the basis of this application.

Signature

Date

29 July 1998

12. Name and daytime telephone number of person to contact in the United Kingdom

B D Stooles 01293 556968

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

WELLBORE FLUID

This invention relates to wellbore fluids suitable for use in the oil and gas exploration and production industries and embraces fluids used for drilling, under-reaming, completion, cementing, fracturing, stimulation, workover and packing of wellbores and also includes spacer fluids whose function is to separate two fluids during pumping operations and spotting fluids whose function is to treat certain intervals of the wellbore.

In the process of rotary drilling a well, a drilling fluid or mud is being circulated down the rotating drill pipe, through the bit, and up the annular space between the pipe and the formation or steel casing, to the surface. The drilling fluid performs several different functions, such as removal of drilled cuttings from the bottom of the hole to the surface, suspension of cuttings and weighting material when circulation is interrupted, control of subsurface pressures, maintaining the integrity of the wellbore until the well section is cased and cemented, isolating the fluids from the formation by providing sufficient filtration control to prevent excessive loss of fluids to the formation, cooling and lubricating the drill string and bit, maximising penetration rate etc.

The required functions can be achieved by a wide range of fluids composed of various combination of solids, liquids and gases and classified according to the constitution of the continuous phase mainly in two groupings : aqueous (water-based) drilling fluids, and non-aqueous (mineral oil or synthetic-base) drilling fluids, commonly 'oil-base fluids'

Other types of fluid used in well operations include completion fluids, a term which commonly refers to fluids pumped after drilling finishes but prior to starting production, and workover fluids, used in remedial operations usually on a well that is already producing.

During the operations for drilling and completing hydrocarbon-bearing formations (reservoirs), an overbalance pressure is often applied which causes fluid loss from the wellbore into the reservoir rock. This filtration process causes solid particles to block pores in the formation with the build-up of a low permeability internal filtercake comprised of the solid phases present in the fluid, as shown figure 1. The depth of invasion may be from a few millimetres to (occasionally) many centimeters. This is the primary cause of damage (loss of productivity) in open hole wells, a phenomenon which is increased by a large overbalance pressure. Furthermore the formation of a

thick filter cake may lead to an increased risk of getting drill pipes or measuring tools stuck in the wellbore and to failure in cementing the wellbore casings.

Mud solid invasion is also important when the well comprises large natural fractures as shown figure 2. The fractures invaded by the mud are no longer available to drain the oil into the wellbore. In workover operations, perforations may be also invaded in the same way.

It is therefore highly desirable to provide means to reduce these kinds of formation damage.

High fluid loss, especially spurt loss, tends to increase mud invasion. Accordingly, additives of a polymeric type, such as biopolymers (Xanthan, Scleroglucan), starches and celluloses (hydroxyethyl cellulose[HEC], polyanionic cellulose [PAC]), are added to provide viscosity and fluid loss control.

Usually wellbore fluids also contain inorganic solids such as clays, barite and calcium carbonate. When considering minimising mud invasion, an important aspect in selecting such inorganic solids is their particle size distribution for the particles to seal the entrance to pores or fractures in the reservoir rock. The "bridging" solids are combined with water soluble or colloidal polymers to enhance the seal.

Sized particles limit the depth of invasion as shown figures 3 and 4, where the pore or fracture entrance is sealed with bridging solids. The solids used include for instance ground silica (especially common in fracturing operations), mica, calcium carbonate, ground salts and oil soluble resins.

Another often interrelated approach is to use soluble solids to allow subsequent clean-up with wash fluids. Accordingly sized calcium carbonate (that can be dissolved by acid and therefore be removed from the pores) is a typical component of drill-in fluids. The polymers used in conjunction with the calcium carbonate are often selected on the basis that they can also be broken down by acid or enzyme treatments to prevent them impairing the permeability of the formation.

However, these remedial treatments involving the use of strong acid (for instance 15% HCl) have a high cost and can be hazardous and ineffective for the following reasons. Poor dissolution of the filter cake can be caused by zones of higher permeability channelling acid away and into the formation. This can lead to further formation damage. Strong acids involve health and safety

issues and cause corrosion of sand screens and downhole equipment. Treating a wellbore interval also raises placement issues. Moreover, laboratory tests have shown that the acids can be damaging to the reservoir rock matrix.

Because of these limitations there are many systems and products on the market to try and improve the performance of filter cake clean up treatments. However, these tend to have associated problems. For example, the use of alkaline oxidising agents can lead to problems of iron oxide scale in metal tubulars. Enzymes take a long time to react and are limited in application by temperature, pH and salinity. Internal breakers, such as magnesium peroxide, can be added to the reservoir drill-in fluid so it forms part of the filter cake. This is then activated by acid to produce hydrogen peroxide to facilitate the breakdown the polymers in the cake. Unfortunately, this can actually happen in the reservoir drill in fluid whilst drilling which can have a negative effect on fluid properties.

The present invention aims at providing new wellbore fluids which can form an easy-to-remove filter cake.

The invention provides a fluid system that, when used for the purposes of drilling, completing, cementing, stimulating, packing or working over a wellbore, will facilitate filter cake removal. This fluid system can comprise aqueous or non-aqueous based fluids (such as hydrocarbon based fluids). The result will be reduced or often negligible impairment of permeability of the producing formation by the relevant reservoir servicing fluid compared with well servicing fluids containing conventional bridging materials.

In accordance with the present invention, acetal crosslinked polymers are used as the bridging agent in the relevant fluid. In essence the bridging material is made of a particulate material which may swell but is substantially insoluble in water under non-acidic conditions (at $\text{pH} > 7.5$) and which is degraded at acidic pH (below 6.5) to substantially solids-free or soluble decomposition products. The particles are composed of the reaction product of A) one or more water soluble organic compound(s) having a molecular weight of less than 30,000 and possessing at least two hydroxyl groups and B) any other organic compound(s) capable of forming acetal or hemiacetal cross-links with the hydroxyl groups of compound A.

Examples of compounds A with free hydroxyl groups capable of entering into the crosslink reaction of the invention include monosaccharides, oligosaccharides, polysaccharides of molecular weight less than 30,000, glycerol, polyglycerols, erythritol, pentaerythritol, mannitol, sorbitol, glycols, polyalkylene glycols, and low molecular weight water soluble vinyl polymers possessing hydroxyl groups.

Suitable acetal crosslink agents B include aliphatic monoaldehydes and dialdehydes having from 2 to 10 carbon atoms and esters of propiolic acid wherein the alcohol forming the ester has from 1 to 8 carbons. A preferred compound is 1,5 pentanedial (glutaric dialdehyde) $C_5H_8O_2$.

Usually, the amount of cross-linking agent varies from 0.5 to 15% w/w (and the amount of compound A accordingly varies from 99.5 to 85% w/w).

An example of a useful material has been prepared from 95% yellow dextrin (a gum produced from the acid hydrolysis and depolymerisation of starch feedstock) and 5% by weight pentanedial.

Acetal crosslinked starches are known from U.S. Patents 4,048,435 and 4,098,997 that describe methods of preparing reversibly crosslinked granular starches for use in the paper, adhesives and textile industries but with no mention as to their potential use in the oil industry. It is stated that these starches contain acetal crosslinkages, which are stable under neutral or alkaline conditions but which readily hydrolyse under acidic conditions, and they are designed to dissolve and form a colloidal suspension in water. By contrast, the present invention contemplates the cross-linking of much lower molecular weight polyols than the above mentioned starches to produce a particulate suspension where the particles do not dissolve or disperse at alkaline pH.

The solid may be ground or prepared to any desired particle size.

The particles are stable under alkaline conditions and insoluble (but usually swell) in aqueous wellbore fluids of pH 7.5 and above. Thus they provide very effective sealing of the formation by virtue of the swollen particles' ability to deform to "fit" the pore openings or fractures.

Most advantageously however, the cross links rapidly hydrolyse under acidic catalysed conditions, under even weakly acidic conditions at pH 6.5 and below. The degradation products are essentially solids free water soluble moieties of low molecular weight and low viscosity in solution. Hence any flow restriction (of hydrocarbons) caused by the particles may be efficiently

removed. A low pH solution such as a weak easily-handled acid of little corrosion potential may be pumped in place to catalytically degrade the particles. Alternatively, produced fluids, be they oil and water or gas and water, usually exhibit an aqueous pH of less than pH 6.5 due to the carbon dioxide commonly present. Hence the removal of the temporary seal may be triggered simply by allowing the well to flow. As the seal degrades the well flow increases autocatalytically.

The hydrolysis does not consume the acid. Hence much enhanced clean up and optimised well productivity is anticipated compared to that exhibited when using current materials such as ground calcium carbonate.

The following features and benefits have been identified with the use of acetal crosslinked, polymeric, bridging solids:

- Filter cakes made from these novel materials almost totally degrade in the presence of weak acid giving almost 4x the return flow rate compared to a corresponding calcium carbonate based fluid under the same conditions. This also gives the benefits of better health and security from handling weak acids and less corrosion of downhole screens and equipment.
- A feature of the invention is that the degradation of the acetal bridging material is acid catalysed, as opposed to the conventional stoichiometric reaction. This means the acid is not consumed or neutralised in the reaction. The benefit of this is an enhanced acid treatment as the acid is available to go on degrading more filter cake.
- Due to the high mobility of the hydrogen ion (which can therefore penetrate the water-swollen particles), the acid does not have to be forced into the filter cake to break it down. Which means that less acid induced damage results from strong acid being forced into the formation causing fines to migrate, bridge and restrict production.
- Acetal crosslinked bridging materials can degrade under simulated well flowing conditions in the laboratory, where the weak acid is provided by produced CO₂ forming carbonic acid in the aqueous phase. This could negate the need for a costly wash fluid treatment.
- Acetal bridging materials have a low density. A low density will enable a wider range of applications to be covered, since density constraints often limit the amount of bridging solid which can be used. Calcium carbonate has a density of 2.7 S.G. and cannot always be added at

the desired concentrations for bridging in low density fluids. Another benefit will be improved removal of undesirable, non acidisable, contaminating solids, from the fluid. Contaminating solids from the formation have roughly the same density as calcium carbonate which makes separation difficult in a conventional fluid. However, these solids are approximately 2.7 times denser than the acetal bridging solid. This means that highly efficient separation techniques, such as centrifugation, can be employed to remove non acidisable solids from the fluid without removing the acetal bridging solids. This therefore makes the fluid less formation damaging.

Preparation of an acetal bridging solid.

95 weight parts of dry yellow dextrin was dissolved in water and 5 weight parts pentanediol added. The sample was mixed and heated to 130°C. The water was then removed under partial vacuum over a 16 hour period. The solid from this was then ground to a fine particle size (substantially all less than 150 microns) and tested as follows.

The wellbore fluids in the following examples have been tested using a high pressure/high temperature fluid loss cell as schematically represented figure 5. Such an apparatus typically comprises a measuring cell 1 closed by an upper cover provided with a central passage 2 and a bottom provided with a drain 3. The bottom is covered with a base made of a porous material, in this instance a 5 micron aloxite disc. Gas can be injected to provide the differential pressure between the mud and the formation fluids. The product doses are expressed in pounds per barrel (ppb).

Example 1

A fluid system of this invention (Acetal fluid) was compared to one of conventional formulation, CaCO₃ based fluid (comparison fluid) containing 49ppb calcium carbonate bridging solids, 6ppb DUALFLO filtration control additive, 1ppb IDVIS viscosifier and suspending agent, 25ppb CaCl₂, 2ppb PTS200 alkaline buffer.

The Acetal fluid contains - 40ppb ACETAL bridging solids, 6ppb DUALFLO, 1ppb IDVIS, 43ppb KCl, 2ppb PTS200.

The testing of the fluids was according to the following protocol, schematically illustrated figure 5 where the arrows indicate the direction of the fluid flow in the core plugs (the upwards arrow corresponds to fluid loss from the subterranean rock to the wellbore while the downwards arrow characterises fluid loss from the wellbore into the subterranean rock).

- Step 1: 'apply' mud damage, using the tested wellbore fluid, to a 5 micron aloxite disc under typical well conditions (temperature 80° C, pressure of 500 psi). Fluid loss is measured after 15.5 hours (downwards arrow). A filter cake is formed on the aloxite disc.
- Step 2: cell emptied hot and refilled with 10% NaCl brine and 12/20 sand. A 45 micron aperture screen was then placed on the sand. The sand is used for modelling a gravel pack which may be placed in a well to control sand production.
- Step 3: simulates the flow from the reservoir oil into the wellbore through the filter cake (upwards arrow) , using kerosene flow back and a typical formation pressure of 4 psi with carbon dioxide as the pressuring gas at 80°C.
- Step 4 : Flow 500g of CO₂ containing kerosene, shut the cell and leave for 64 hours at 80°C and then test the flow rate in the production direction

Sample	15.5 hr. Fluid loss	Flow rate after shut in
	(ml)	(g/min)
CaCO ₃ bridging solids	17	22..2
Acetal bridging solids	20	33.6

The example illustrates the effect that an ACETAL fluid filter cake is degraded in the presence kerosene containing dissolved carbon dioxide. The return flow rate for the ACETAL fluid was 1.5 x higher than for the CaCO₃ fluid. This test suggests that naturally occurring fluids from a production zone will degrade the filter cake even in the absence of applied acid. It can also be seen

that using all acetal bridging solids gives a slightly higher fluid loss. It was found that the use of a small amount of calcium carbonate in conjunction with the acetal solids reduced the filtrate loss, allowing a lower concentration of DUALFLO fluid loss additive to be utilised in the following examples.

Example 2

The CaCO_3 based fluid contains - 40ppb calcium carbonate, 6ppb DUALFLO, 1ppb IDVIS, 43ppb KCl, 1ppb PTS100.

The ACETAL based fluid contains - 7ppb calcium carbonate, 30ppb ACETAL solids, 3ppb DUALFLO, 1ppb IDVIS, 43ppb KCl, 3ppb PTS100.

The following test protocol is used

- Step 1: 'apply' mud damage, using the tested wellbore fluid, through a 5 micron aloxite disc at a temperature of 80° C and a pressure of 500 psi. The fluid loss is measured after 15.5 hours.
- Step 2: cell emptied hot and refilled with 100 ml 5% citric acid as a moderated acidic wash fluid.
- Step 3: Reseal cell, do not pressurise, leave 72 hours at 80°C
- Step 4 : Open cell and fill with 12-20 sand and fit 45 micron aperture screen
- Step 5: Carry out kerosene return flows at 4psi, at a temperature of 80°C.

Sample	16.5 hr. Fluid loss (ml)	Flow rate (g/min)	pH of produced fluids
CaCO_3 fluid	23	21.2	5.9
ACETAL fluid	17	80.9	2.0

The example signifies that under mild acid conditions the return flow rate for the ACETAL fluid was nearly 4x higher than for the CaCO_3 fluid, indicating that the ACETAL fluid filter cake has degraded to a much greater extent. This was confirmed on opening the cell which showed the presence of a large filter cake for the CaCO_3 fluid and little to no filter cake for the ACETAL fluid. The lower pH of the produced fluids from the cell containing the ACETAL filter cake indicates that the acid is not being used up to the same extent as with CaCO_3 filter cake. The example also demonstrates that the filter cake is degraded without pressurisation of the cell. Conventionally, these tests are typically carried out under pressure to force acid into the cake.

Example 3

The CaCO_3 based fluid contains - 40ppb calcium carbonate, 6ppb DUALFLO, 1ppb IDVIS, 43ppb KCl, 2ppb PTS200, 15ppb OCMA clay.

The ACETAL based fluid contains - 7ppb calcium carbonate, 30ppb ACETAL solids, 3ppb DUALFLO, 1ppb IDVIS, 43ppb KCl, 3ppb PTS100 15ppb OCMA clay.

The test protocol of example 2 was used except that step 1 lasted only 15.5 hours and step 3 20hours.

Sample	15.5 hr. Fluid loss	Flow rate
	(ml)	(g/min)
CaCO_3 fluid	32	9.8
ACETAL fluid	18.8	21.4

The example demonstrates that an ACETAL fluid filter cake containing non acidisable OCMA clay is degraded by weak acid in a short time. The return flow rate for the ACETAL fluid was 2.2

x higher than for the CaCO_3 fluid, indicating that the ACETAL fluid filter cake has degraded to a much greater extent.

Example 4

The CaCO_3 based fluid contains - 40ppb calcium carbonate, 6ppb DUALFLO, 1ppb IDVIS, 43ppb KCl, 2ppb PTS200.

The ACETAL based fluid contains - 10ppb calcium carbonate, 30ppb ACETAL solids, 3ppb DUALFLO, 1ppb IDVIS, 43ppb KCl, 2ppb PTS200.

The following test protocol was used :

- Step 1: 'apply' mud damage, using the tested wellbore fluid, through a 5 micron aloxite disc at a temperature of 80°C and a pressure of 500 psi. The fluid loss is measured after 15.5 hours.
- Step 2: cell emptied hot and refilled with 0.1m (0.37%w/v) HCl and 12/20 sand and a 45 micron aperture screen fitted.
- Step 3: The cell was resealed and left for 4hours @ 80°C
- Step 4: then kerosene flow backs carried out at 4psi and 80°C .

Sample	15.5 hr. Fluid loss (ml)	Flow rate (g/min)
CaCO_3 fluid	29	20.7
ACETAL fluid	16	32.0

The example demonstrates that exposure of ACETAL fluid filter cake to even a highly diluted acid causes it to degrade in only a short time. The return flow rate for the ACETAL fluid was 1.5 x higher than for the CaCO_3 fluid.

Claims

1. A wellbore fluid comprising a particulate material composed of the reaction product of A) one or more water soluble organic compound(s) having a molecular weight of less than 30,000 and possessing at least two hydroxyl groups and B) any other organic compound(s) capable of forming acetal or hemiacetal cross-links with the hydroxyl groups of compound A.
2. The wellbore fluid of claim 1, wherein hydroxyl compound A is selected from the class including monosaccharides, oligosaccharides, polysaccharides of molecular weight less than 30,000, glycerol, polyglycerols, erythritol, pentaerythritol, mannitol, sorbitol, glycols, polyalkylene glycols, and low molecular weight water soluble vinyl polymers possessing hydroxyl groups.
3. The wellbore fluid of claim 1 or claim 2, wherein compound B is selected from the class including aliphatic aldehydes and dialdehydes having from 2 to 10 carbon atoms, and esters of propiolic acid wherein the alcohol forming the ester has from 1 to 8 carbon atoms.
4. The wellbore fluid of any preceding claim, wherein 0.5-15% dry weight of compound A^B reacted with 99.5-85% of said compound B_A.
5. The wellbore fluid of any preceding claim, wherein the particulate material is the reaction product of dextrin and pentanedial.
6. Application of the wellbore fluid according to any of the preceding claim as any of the following well processes : drilling, under-reaming, completing, working over, sealing loss zones, sealing fractures, sealing cavities or other very high permeability conduits in a rock formation, or hydraulic fracturing to stimulate a hydrocarbon-producing zone
7. A process wherein after any of the well processes of claim 6, a low pH fluid containing any acid or buffered solution of less than pH 6.0 is pumped into the producing zone segment of the wellbore to catalyse the decomposition of the particulate material of this invention.
8. A process wherein, after any of the well processes in claim 6 or claim 7, the well is allowed to flow causing a drop in pH which catalyses the decomposition of the particulate solids of this invention permitting yet increased flow of produced fluids.

9. A particulate material composed of the reaction product of A) one or more water soluble organic compound(s) having a molecular weight of less than 30,000 and possessing at least two hydroxyl groups and B) any other organic compound(s) capable of forming acetal or hemiacetal cross-links with the hydroxyl groups of compound A.
10. The particulate material of claim 9, wherein the hydroxyl compound A is selected from the class including monosaccharides, oligosaccharides, polysaccharides of molecular weight less than 30,000, glycerol, polyglycerols, erythritol, pentaerythritol, mannitol, sorbitol, glycols, polyalkylene glycols, and low molecular weight water soluble vinyl polymers possessing hydroxyl groups.
11. The particulate material of claim 9, wherein the compound B is selected from the class including aliphatic aldehydes and dialdehydes having from 2 to 10 carbon atoms, and esters of propiolic acid wherein the alcohol forming the ester has from 1 to 8 carbon atoms.

Wellbore Fluid

The present invention relates to a wellbore fluid comprising a particulate material composed of the reaction product of A) one or more water soluble organic compound having possessing a molecular weight of less than 30,000 and possessing at least two hydroxyl groups and B) any other organic compound(s) capable of forming acetal or hemiacetal cross-links with the hydroxyl groups of compound A. The invention relates also to the specific particulate material itself and to applications of the wellbore fluid of the invention for well processes such as drilling, under-reaming, completing, working over, sealing loss zones, sealing fractures, sealing cavities or other very high permeability conduits in a rock formation, or hydraulic fracturing to stimulate a hydrocarbon-producing zone.

1/2

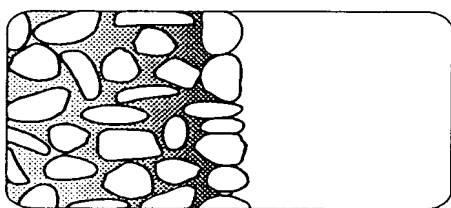


Figure 1

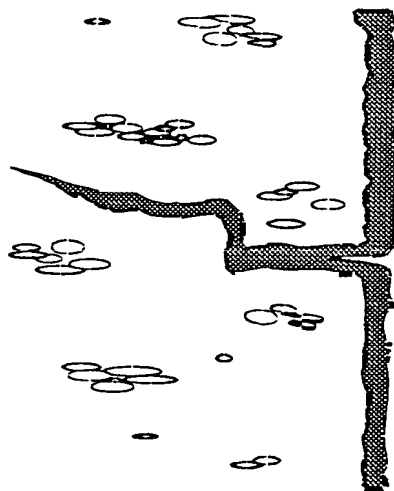


Figure 2

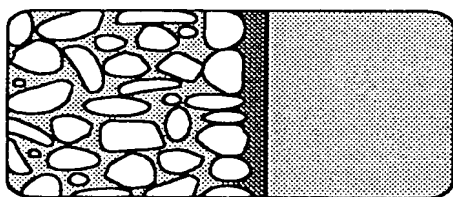


Figure 3

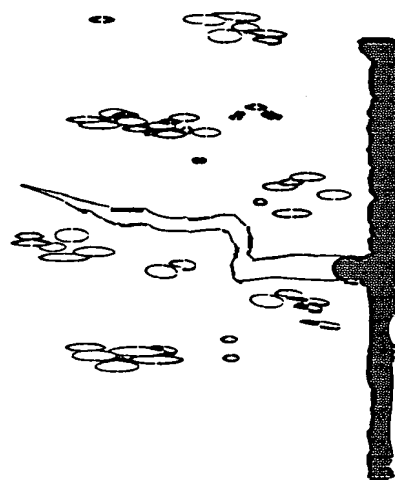


Figure 4



2/2

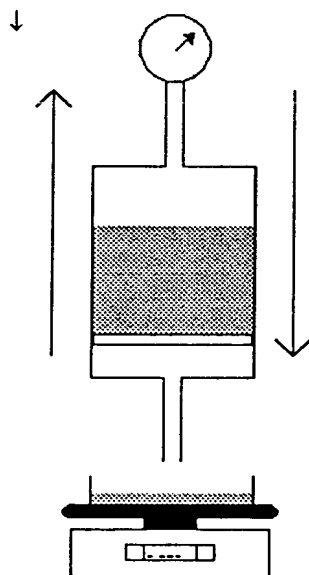


Figure 5

